

MCB – Male Connector

- Our products are widely used in water purification, food/beverage and pneumatic systems
- Providing quick and convenient assembly saving time & expense
- Can be assembled & disassembled repeatedly


Technical Information

Fitting Working Pressures & Temperature

SIZE °C & °F	15mm	16mm	18mm	22mm	28mm
1°C (34°F)	11bar (170PSI)				
20°C (68°F)	11bar (170PSI)				
65°C (150°F)	7bar (100PSI)				


Maximum Permission Torque

Thread	1/8" , 1/4"	3/8" , 1/2"	3/4"
Torque			
Max (Nm)	1.5	3.0	4.0

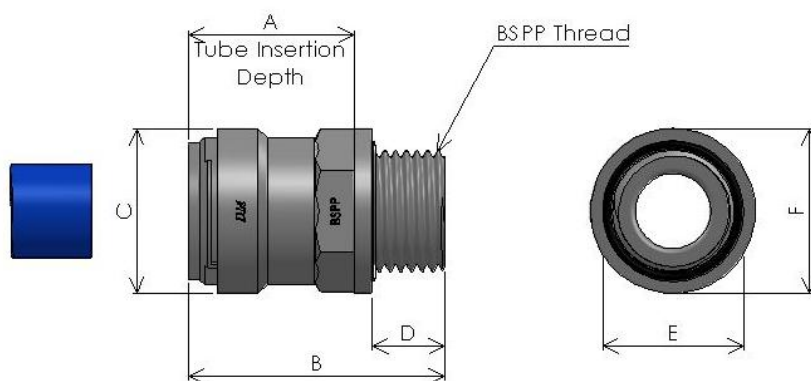

UNIT : mm / Tolerance : ± 0.2mm

Part No.	Tube O.D(mm)	BSP(P) Thread	A	B	C	D	E	F
AMCB 1507M	15	1/2"	28.30	43.60	28.00	12.45	24.00	27.70
AMCB 1509M	15	3/4"	28.30	45.25	28.00	12.90	24.00	35.55
AMCB 1607M	16	3/4"	28.15	43.60	28.00	12.45	24.00	27.70
AMCB 1609M	16	3/4"	28.15	45.25	28.00	12.90	24.00	27.70
AMCB 2209M	22	3/4"	33.25	51.10	34.50	15.00	32.00	39.50

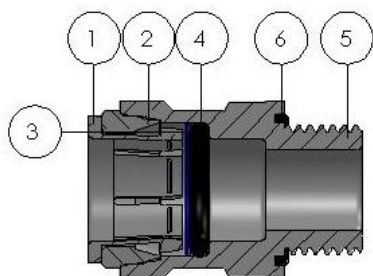

Part List

No.	Part Desc.	Materials
1	CLIP	POM + STS
2	CAP	POM
3	S-RING	POM
4,6	O-RING	NBR & EPDM
5	BODY	POM